




SEALED TIGHT SOLUTIONS

fire & smoke

fire test data

All STS acoustic data is sourced, supplied and verified by independent, UKAS-accredited test facilities in accordance with all relevant British and European standards.

Approved Document 'B' (Fire Safety)
Approved Document 'M' (Access To and Use of Buildings)
BS 9999
BS 476: 22 - 1987
BS 8214 - 2008

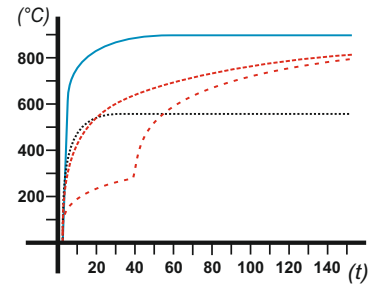

STS 105GT

Glazing tape - FD30/FD60 doors

For SCREENS see STS data sheet :24

Characteristics

Product code	Colour(s)	Size / Length	Features
STS 105GT	● BLACK	10mm x 5mm 100m/COIL	INTUMESCENT COMPRESSIBLE EASY FIT
STS 105GT-3 "COLOUR"	● BLACK ● BROWN ○ WHITE	10mm x 3mm 150m/COIL	COST-EFFECTIVE FULLY PROVEN FD30 & FD60* COMPLIANT

Characteristics

Material	Fitting / installation	Performance
Closed-cell foam	Apply and trim to length	GLASS - from 6mm GWPP and above* *Refer to manufactures' test data


STS 302 LINER

Glazing liner - FD60 doors


Characteristics

Product code	Colour(s)	Size / Length	Features
STS 302 LINER	○ WHITE	30mm x 2mm 100m/COIL	INTUMESCENT EASY FIT COST-EFFECTIVE FULLY PROVEN


FD30 option - no liner

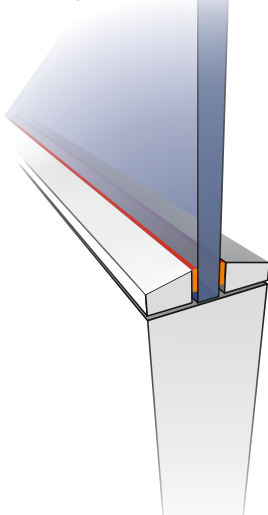

FD60 option - with liner

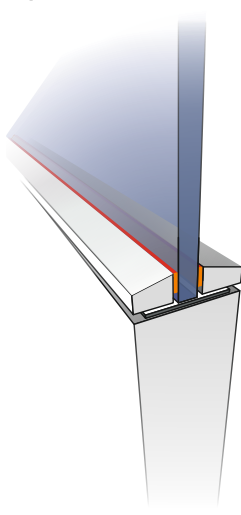

FD60 option - with liner

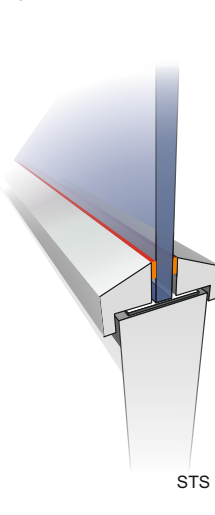

STS 105GT product shown orange/red for illustrative purposes only.

:23

