




## acoustic test data

All STS acoustic data is sourced, supplied and verified by independent, UKAS-accredited test facilities in accordance with all relevant British and European standards.

- Approved Document 'E' (Passage of Sound)**
- Approved Document 'B' (Fire Safety)**
- Approved Document 'M' (Access To and Use of Buildings)**
- Building Bulletin 93 (Acoustic design in schools)\***

\* See also: "Acoustic Performance Standards for the Priority Schools Building Programme" including: "Technical Guidance Document TGD-021-5 Acoustic Performance in Schools"

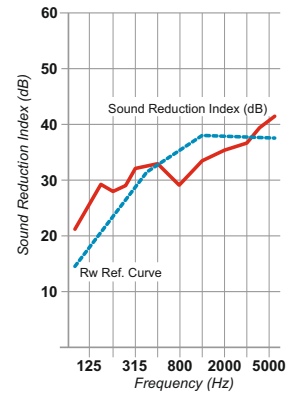

:12

## VICAIMA

### 44mm & 54mm



44mm - Single / Flush

Head / Jambs	Door-bottom		Sound Reduction (dBRw)
ST1009 perimeter seal	STS 422 drop seal		<b>33</b> <a href="#">see STS ref: 99</a>



44mm - Single / Glazed

Head / Jambs	Door-bottom	Glass	Sound Reduction (dBRw)
ST1009 perimeter seal	STS 422 drop seal	6mm	<b>34</b> <a href="#">see STS ref: 102</a>



54mm - Single / Flush

Head / Jambs	Door-bottom		Sound Reduction (dBRw)
ST1009 perimeter seal	STS 422 drop seal		<b>33</b> <a href="#">see STS ref: 103</a>



54mm - Single / Glazed

Head / Jambs	Door-bottom	Glass	Sound Reduction (dBRw)
ST1009 perimeter seal	STS 422 drop seal	12mm	<b>33</b> <a href="#">see STS ref: 101</a>

